


Rig 2

Swing Lift, Triple

Current Location: Pakistan

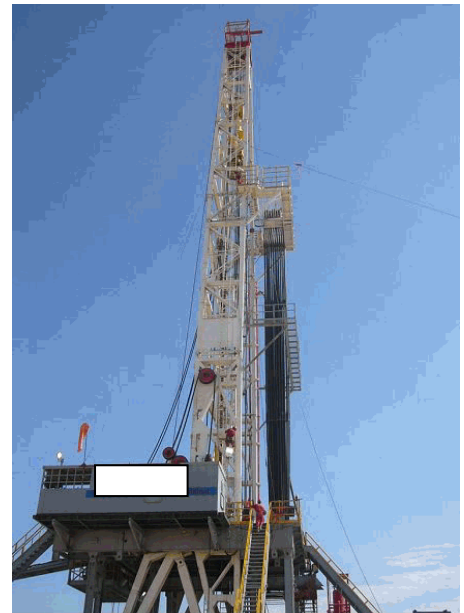

General Description

Make	BOMCO
Year Built/Rebuilt	2007
Estimated Drilling Depth	19,600 ft
Estimated Rig Move Loads	136
Estimated Camp Move Loads	35
Rated HP	2000

Mast

Height	152.00 ft
Static Hook Load Capacity	1,000,000 lbs
Mast Racking Capacity	20,000 ft

Substructure

Style	Parallelogram
Height	34.00 ft
Clear Height	30.00 ft
Casing Capacity	1,000,000 lbs
Maximum Setback Load (lbs)	495,000

Drawworks

Make	BOMCO
Model	JC-70DB
Power Rating	2,000 hp
Input Power	3 ea General Electric GEB22-A3
Brake Type - Band or Disc	Disc Brake
Drilling Line Size	1 1/2"

Top Drive / Power Swivel

Make	NOV
Model	TDS 11-SA
Capacity	350 Ton
Torque - Continuous	370,000 ft-lb @ 125 RPM
Model	TDS-11SA
Capacity	350 Ton

No Swivel

Rotary Table

Make	BOMCO ZP-375
------	--------------

Table Opening	37 1/2"
Maximum Load Rating	.650 Ton

Power Generation

Engines	4 ea Caterpillar D 3512B
---------	--------------------------

Generators	4 ea Caterpillar SR4B
------------	-----------------------

SCR / VFD / DC/DC	VFD Rig
-------------------	---------

Enhancements

Crane	Terex RT 555-1
Iron Roughneck	NOV ST-80 C

Mud System

Mud Pumps	3 ea BOMCO F-1600
Power Rating	1,600 hp @ 120 spm
Pressure Rating	5,000 psi
Active Mud Volume	720 bbls
Reserve Mud Volume	1,450 bbls
Shale Shakers	5 ea Derrick Corporation FLC 503
Mud Cleaner	N/A
Desander	N/A
Desilter	N/A
Centrifuge	N/A

Well Control

Annular	13 5/8" 5,000 psi, Hydril, GX
	21 1/4" 2,000 psi, Shaffer,
Single Ram Preventer	13 5/8 10,000 psi, Cameron, Type U
	13 5/8 10,000 psi, Cameron, Type U-SINGLE
Double Ram Preventer	13 5/8" 10,000 psi, Cameron,
	21 1/4" 2,000 psi, Cameron, U-DBL
Choke Manifold	Energy Equipment Corporation 4 1/16" 10,000 psi
BOP Closing Unit	Cameron Drilling Systems 2186200-54 Rev.1