INVENTORY with Photos

NOV

COLLAR TYPE ELEVATORS A SERIES 4
18° TYPE ELEVATORS G SERIES 4
X-SERIES SIDE DOOR ELEVATORS 6
HYDRAULIC ACTUATED ELEVATORS AND ROTATORS 7
SIZE COMPONENTS BX4-50, 4-75 8
WELDLESS LINKS 9
CUL AND CB CASING BUSHINGS 10
BAASH ROSS HINGED CASING SPIDER 11
CMS & DCS SLIPS 11
MULTIPURPOSE SAFETY CLAMP 12
LIFTING SLINGS 13
MANUAL TONGS 13
AUTOMATED IRON ROUGHNECKS AR-5000 14
HYDRAULIC UTILITY WINCH 15
FISHING TOOLS 16
SPARE PARTS 17

BVM

SIDE DOOR 90° ELEVATORS 19
COLLAR TYPE ELEVATOR 19
CASING SPIDER 20
CASING SLIPS 20

BLOHM + VOSS

VES-SD 500 DOUBLE DOOR HYDRAULIC ELEVATORS 22
SDS SIDE DOOR ELEVATORS 23
HCS HINGED CASING SPIDER 24
SLIP LIFTER 24
SINGLE JOINT ELEVATORS 25
VES-CL BUSHINGS 25
PS-1000 HYDRAULIC OPERATED POWER SLIPS 26
MASTER BUSHINGS & RT-ADAPTERS 28

OTHER BRANDS

LOAD CELLS AND INSTRUMENTATION 30
ELECTRIC MOTORS AND BLOWERS 30
PIPE HANDLING AND MISCELLANEOUS 31

General information. All equipment is offered from stock, subject to prior sale. Prices on request. Items marked **NEW** are new / unused. Load ratings in short tons / metric tonnes unless stated otherwise. Serial numbers as per our stock records. Images marked **Stock photo** show the offered equipment in our stock. All other product images and drawings are reproduced from the respective manufacturers' catalogs and data sheets (NOV, Blohm + Voss) for reference only.

NOV

National Oilwell Varco · Varco BJ · Baash Ross · Bowen

Elevators · BX hydraulic elevators · Weldless links · Casing bushings · Spiders · Slips & safety clamps · Lifting slings · Tong parts · Iron roughnecks · Winch · Fishing tools · Spare parts

PetroRigs



COLLAR TYPE ELEVATORS A SERIES

TA center latch elevators

Manual center latch elevators for collar type tubulars. Load rating 150 sTon / 136 Tonne.



TECHNICAL SPECIFICATIONS A SERIES

Type	Part number	Oracle number	Size [inches]	Load Rating [sTon/Tonne]	Max. Weight [lbs]	[kg]	Serial number	Remarks
TA	39342Y370	10111364-001	9.1/2	150 / 136	524	238	NL0128934	
TA	RT	8A-0056	9	150 / 136			201004	

18° TYPE ELEVATORS G SERIES

HGG / GG center latch elevators – manual and air operated

Center latch elevators with 18° taper for drill pipe. HGG rated 500 sTon, GG rated 350 sTon. Air operated (AO) versions with wear bushing.



GG series elevator



Stock photo · GG AO air operated elevator, S/N NL49333

TECHNICAL SPECIFICATIONS G SERIES

Type	Part number	Oracle number	Size [inches]	Load Rating [sTon/Tonne]	Max. Weight [lbs]	[kg]	Serial number	Remarks
HGG	70013Y123	10146329-001	4.1/2	500 / 454	1,029	467	NL0116713	
HGG	70013Y123	10146329-001	4.1/2	500 / 454	1,029	467	NL53883	
HGG	70013Y123	10146329-001	4.1/2	500 / 454	1,029	467	NL102114	
HGG	200060Y123	10111257-001	4.1/2	500 / 454	1,010	459	NL19208	
HGG	70013Y123	10146329-001	4.1/2	500 / 454	1,029	467	NL29894	
HGG	70013Y124	10146330-001	5.1/2	500 / 454	1,029	467	NL0124796	
HGG	200060Y124	10022107-001	5.1/2	500 / 454	1,010	459	NL38817	**NEW**
HGG	70013Y789	10490429-002	6 (5.7/8" DP, 6" upset)	500 / 454	1,029	467	NL0126206	5 7/8 DPW / UPSET

TECHNICAL SPECIFICATIONS G SERIES (CONTINUED)

Type	Part number	Oracle number	Size [inches]	Load Rating [sTon/Tonne]	Max. Weight [lbs]	[kg]	Serial number	Remarks
HGG	70013Y740	10490429-001	6.5/8	500 / 454	1,029	467	NL0126404	6 5/8'' IEU DP
HGG	70013Y740	10490429-001	6.5/8	500 / 454	1,029	467	NL0128840	**NEW** · 6 5/8'' IEU DP
HGG	70013Y740	10490429-001	6.5/8	500 / 454	1,029	467	NL0134357	
GG	31068Y123	10111324-001	4.1/2	350 / 318	693	314		
GG	31068Y124	10153853-021	5.1/2	350 / 318	693	314	NL958119	
GG	31068Y124	10153853-021	5.1/2	350 / 318	693	314	NL93787	
GG	31068Y124	10153853-021	5.1/2	350 / 318	693	314	NL0105440	
GG	200056Y124	10021851-019	5.1/2	350 / 318	680	310	NL5477881	**NEW**
GG	200056Y123	10021851-001	4.1/2	350 / 318	680	310	NL25838	

AIR OPERATED ELEVATORS G SERIES

Type	Part number	Oracle number	Size [inches]	Load Rating [sTon/Tonne]	Max. Weight [lbs]	[kg]	Serial number	Remarks
GG AO	200024Y123	10359113-001	4.1/2	350 / 318	1,010	459	NL18209	
GG AO	200024Y123	10359113-001	4.1/2 EU / 5 IEU	350 / 318	1,010	459	NL18200	4 1/2 - 5 IEU
GG AO	200024Y124	10153678-007	5.1/2	350 / 318	1,010	459	NL49333	

TECHNICAL SPECIFICATIONS G SERIES WITH WEAR BUSHING (AIR OPERATED)

Type	Part number	Oracle number	Size [inches]	Load Rating [sTon/Tonne]	Max. Weight [lbs]	[kg]	Serial number	Remarks
GG AO	200024Y123	10359113-001	4.1/2	350 / 318	1,010	459	NL49333	
GG AO	200024Y124	10153678-007	5.1/2	350 / 318	1,010	459	NL18209	
HGG AO	200061Y789	10111259-001	5.7/8	500 / 454	1,510	685	NL86701	
HGG AO	200061Y740	10022115-001	6.5/8	500 / 454	1,510	685	NL86989	

PetroRigs


X-SERIES SIDE DOOR ELEVATORS


SMX manual side door elevators

Manual side door elevators for collar type casing, tubing and drill collars. API 8C. Load rating 250 sTon / 227 Tonne.



SMX elevator

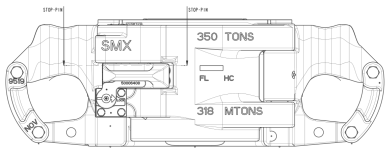





Stock photo · SMX side door elevators

TECHNICAL SPECIFICATIONS X-SERIES

Type	Part number	Oracle number	Size [inches]	Load Rating [sTon/Tonne]	Max. Weight [lbs]	[kg]	Serial number	Remarks
SMX	50006460Y688	10143649-014	22	250 / 227	902	409	NL01280006	
SMX	50006460Y688	10143649-014	22	250 / 227	902	409	NL0130300	
SMX	50006460Y147	10034514-001	20	250 / 227	902	409	NL0126507	
SMX	50006460Y147	10034514-001	20	250 / 227	902	409	NL0128667	
SMX	50006450Y145	10143612-005	16	250 / 227	679	308	NL0128099	

HYDRAULIC ACTUATED ELEVATORS AND ROTATORS


BX3 · BX5 · BX rotator

Hydraulically actuated elevators with changeable bushings. BX3: casing 9.5/8"–20", 350 sTon. BX5: 3.1/2"–11", 750 sTon (18° tool joint) / 1,000 sTon (90° and 45° shoulder).




BX 3,4,5,7 & 9

BX3™

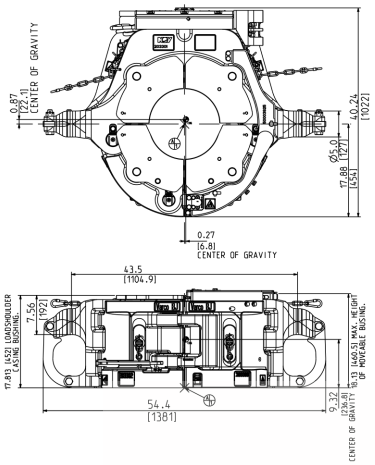

BX5™

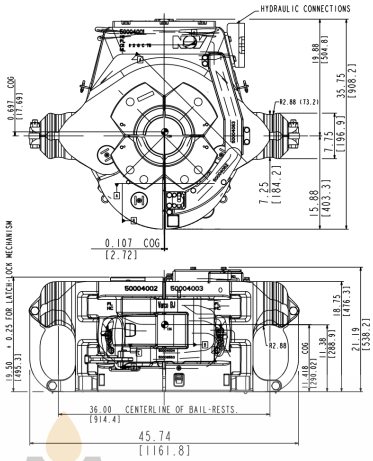





Stock photo · BX3, S/N NL0123096



Stock photo · BX5

BX3 HYDRAULIC ELEVATORS

Type	Part number	Oracle number	Size [inches]	Load Rating [sTon/Tonne]	Max. Weight [lbs]	[kg]	Serial number	Remarks
BX3	203300Y30	10023967-001	9.5/8 – 20	350 / 318	2,165	975	NL89049	weight w/o slips
BX3	203300Y30	10023967-001	9.5/8 – 20	350 / 318	2,165	975	NL89467	weight w/o slips
BX3	203300Y30	10023967-001	9.5/8 – 20	350 / 318	2,165	975	NL0123096	weight w/o slips

BX5 HYDRAULIC ELEVATOR AND BX ROTATOR


Type	Part number	Oracle number	Size [inches]	Load Rating [sTon/Tonne]	Max. Weight [lbs]	[kg]	Serial number	Remarks
BX5	50004000Y30	10034326-001	3.1/2 – 11	750 / 680 (18° TJ); 1,000 / 907 (90° / 45°)	3,295	1,495	NL0121748	weight w/o bushings
Rotator	50004130	10034350-001		Links 350 – 1,250 sTon	709	322	NL2474308	

SIZE COMPONENTS BX4-50, 4-75

BX4 casing, drill pipe and drill collar bushings

Changeable bushings for BX4-50 / BX4-75 hydraulic elevators. Where two part numbers are shown, the first is the former part number and the second the current one.

BX4-50™

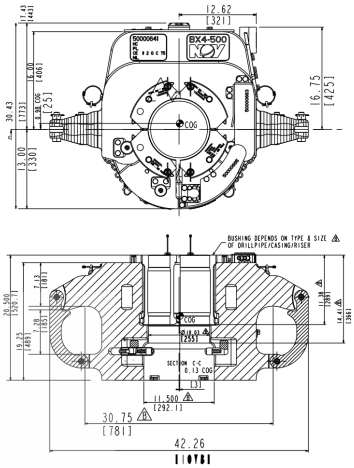


TECHNICAL SPECIFICATIONS

Type	Part number	Oracle number	Size [inches]	Load Rating [sTon/Tonne]	Max. Weight [lbs]	[kg]	Serial number	Remarks
Bushing	50000675Y782	10034292-001	6.5/8 IEU DP	500 / 454			NL0143107	
Bushing	50000675Y782	10034292-001	6.5/8 IEU DP	500 / 454			NL0129848	
Bushing	50000676Y136	10034296-001	7 casing	750 / 680			NL0129685	
Bushing	50000675Y789		5.7/8 DP 18° (6" upset)	500 / 454	230	104	NL0123572	
Bushing	50000676Y141	10034298-001	9.5/8 casing	750 / 680			NL0117649	3x NL0117649 / 1x NL0127711
DC bushing	50000677Y370	10034302-001	9.1/2 DC	150 / 136			NL2520695	
Bushing	203210Y136 / 50000676Y136	10034296-001	7 casing	750 / 680			NL24110	
Bushing	50000676Y136	10034296-001	7 casing	750 / 680			NL0117301	
Bushing	5000067Y136		5.7/8				NL0143107	
Bushing	203212Y779 / 50000675Y779	10034289-001	4.1/2 EU & 5 IEU DP	500 / 454			NL87178	
Bushing	203210Y141 / 50000676Y141	10034298-001	9.5/8 casing	750 / 680			NL90298	
Bushing	203212Y3C		6.5/8				NL88449	
Bushing	203210Y141 / 50000676Y141	10034298-001	9.5/8 casing	750 / 680			NL90302	
Bushing			8.3/4				NL015329	

WELDLESS LINKS

Link bails, per matched set

Forged weldless link bails, offered per matched set (left and right link). Weights are per set.

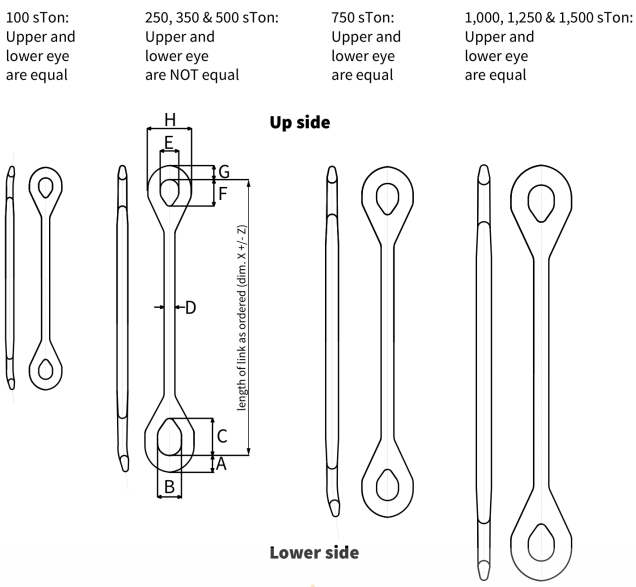

Dimensions A, B, C, D, E, F, G & H are applicable to all links per table.

PART NUMBERS WELDLESS LINKS

Part number	Oracle number	Load rating per set [sTon/Tonne]	Nominal length [inches / mm]	Weight per set [lbs]	[kg]	Serial number	Remarks
26940Y1120-ABS REV. U	10490416-733	350 / 317.5	120" / 3,048 mm	942	427	S/N 790L 790R	
26940Y1120	10490416-776	350 / 317.5	120" / 3,048 mm	942	427	SN 948L 948R	
26940Y1084	10490416-774	350 / 317.5	84" / 2,134 mm	744	338	S/N 108R 108L	
26940Y1216	10490416-738	350 / 317.5	216" / 5,486 mm	1,470	667	278R 278L SR1 SR2-40	
26940Y1100		350 / 317.5				S/N 846R 846L	
25469Y1144	10490415-064	500 / 453.6	144" / 3,657 mm	1,638	743	SN 22L 22R	
25469Y1120	10490415-311	500 / 453.6	120" / 3,048 mm	1,422	645	S/N 39L 39R	
25469Y1180	10490415-156	500 / 453.6	180" / 4,572 mm	1,962	890	631L 631R	
25469Y1180	10490415-156	500 / 453.6	180" / 4,572 mm	1,962	890		
25469Y1132 REV. AC	10490415-998	500 / 453.6	132" / 3,353 mm	1,530	694	S/N 292L 292R	
25469Y1144-ABS REV. W	10490415-065	500 / 453.6	144" / 3,657 mm	1,638	743	S/N 167L 167R	
25469Y1180-ABS REV. W	10490415-315	500 / 453.6	180" / 4,572 mm	1,962	890	S/N 755L 755R	
25469Y1144-ABS REV. W	10490415-065	500 / 453.6	144" / 3,657 mm	1,638	743	S/N 244R 244L	With databook
25469Y1144 REV. W	10490415-064	500 / 453.6	144" / 3,657 mm	1,638	743	S/N 138L 138R	
16143Y1180 REV. H	10490414-096	750 / 680.4	180" / 4,572 mm	4,382	1,988	S/N 44R - 44L	
70101Y1182 - DNV		1,000 / 907.2				S/N 1L 1R	
70101Y1200 - ABS REV. G	10044677-034	1,000 / 907.2	200" / 5,080 mm	5,738	2,602	56R 56L SR1 SR2 - 40	
70101Y1200 - ABS REV. G	10044677-034	1,000 / 907.2	200" / 5,080 mm	5,738	2,602	46R 46L SR1 SR2 - 40	

CUL AND CB CASING BUSHINGS

Split casing bushings

CB split casing bushings for 37.1/2"–49.1/2" rotary tables (CB 10187, 11252, V11763: National; CB 10188: Oilwell). API 7K, 500 sTon.



CB Casing Bushing CUL Casing Bushing



Stock photo · Casing bushings



Stock photo · Casing bushing

CASING BUSHINGS

Type	Part number	Oracle number	Size [inches]	Load Rating [sTon/Tonne]	Max. Weight [lbs]	[kg]	Serial number	Remarks
CB	CB 10187	10776920-001	18, 18.5/8 and 20	500 / 454	1,600	726	CR0008912	7K-0018 12-2010
CB	CB 10188	10861045-001	18.5/8 and 20	500 / 454	1,670	759	CR0008931	7K-0018 12-2010
Bushing	CR 0008810		20	500 / 454				7K-0018 04-2010
CB	CB 11252	10136574-001	22	500 / 454	1,200	544	CR0008921	7K-0018 01-2011
CB	CB V11763	10152557-001	30	500 / 454	1,100	499	CR0008783	7K-0018 02-10
CB	CB V11763	10152557-001	30	500 / 454	1,100	499		7K-0018 2010.10
Bushing	10526892-001 REV. D		30					WO: 153222, ETMW 29844

BAASH ROSS HINGED CASING SPIDER

API 7K 5th edition

Hinged casing spider for Baash Ross UC-3 slips, 36". Rating 200 sTon / 181 Tonne.



Stock photo · Baash Ross 36" spider, S/N NL0126972



Stock photo · Baash Ross 36" spider, S/N NL0126972

BAASH ROSS HINGED CASING SPIDERS

Type	Part number	Oracle number	Size [inches]	Load Rating [sTon/Tonne]	Max. Weight [lbs]	[kg]	Serial number	Remarks
Spider	7704-A-167	10146830-001	36	200 / 181	1,100	499	NL0126972	Use 36" spider

CMS & DCS SLIPS

Varco CMS-XL casing slips and DCS drill collar slips

Multi-segment rotary slips. Number of segments as counted per set; size where marked.



CMS-XL slip



Stock photo · Manual slips and safety clamps in stock

CMS-XL AND DCS SLIPS

Make	Type	No. of segments	Size [inches]	Serial number / ID marking	Remarks
Varco	CMS-XL	13		SLP 02 3706	
Varco	CMS-XL	17		3765 246B 13. 3/8	

CMS-XL AND DCS SLIPS (CONTINUED)

Make	Type	No. of segments	Size [inches]	Serial number / ID marking	Remarks
Varco	CMS-XL	14		CRL 03	
Varco	CMS-XL	17		SLP 09 3786	
Varco	DCS-L	12		18826 - 0 3785	
Varco	CMS-XL	12		CRL 04	NEW
Varco	CMS-XL	23		17294 200	
Varco	CMS-XL	21		17204	
Varco	CMS-XL	20		SLP 13	
Varco	CMS-XL	21		SLP 10	
Varco	CMS-XL	18		CRL 02	NEW
Varco	CMS-XL	18		SLP 12	
Varco	CMS-XL	15		SLP 03	
Varco	CMS-XL	20		17294 244	NEW
Varco	DCS-S	8		SLP 08	
Varco	CMS-XL	25		OV01	
Varco	CMS-XL	14		SLP 01	
Varco	CMS-XL	12			
Varco	CMS-XL	11			
Varco	CMS-XL	15			
Varco	CMS-XL	14			
Varco	CMS-XL	37			NEW
Varco	CMS-XL	21			
Varco	CMS-XL	26		CRL 01	NEW
Varco	CMS-XL	26			
Varco	CMS-XL	30			NEW
Varco	CMS-XL	26		4X 20 01152	

MULTIPURPOSE SAFETY CLAMP

Varco MP safety clamps

Multipurpose safety clamps for flush tubulars. Size range follows from the number of links (NOV MP link table).



MP Safety Clamp

MP SAFETY CLAMPS

Type	Link ref.	No. of links	Size [inches]	Serial number / ID	Remarks
MP safety clamp	3304	19	18.1/8 – 19.3/8 (MP-L)	1107	VARCO 3304 (US 3514)
MP safety clamp	3304	15	13.5/8 – 14.3/4 (MP-M)		VARCO 3304 (US 3514)
MP safety clamp	3304	7		01104	TYPE 3304
MP safety clamp	3304	11	9.1/4 – 10.1/2 (MP-R)		VARCO 3304 (US 3514)
MP safety clamp	3304	8			VARCO 3304 (US 3514)
MP safety clamp	3304	5			TYPE 3304 (E) INSERT C5
MP safety clamp	3304	8		01102	TYPE 3304
MP safety clamp	3304	10	8 – 9.1/4 (MP-R)		VARCO 3304 (US 3514)
MP safety clamp	3304	11	9.1/4 – 10.1/2 (MP-R)	01112	VARCO 3304 (US 3514)
MP safety clamp	3304	15	13.5/8 – 14.3/4 (MP-M)		TYPE 3304 (E)

LIFTING SLINGS

Slings for master bushings, bowls and casing bushings



PN 50001110 / 10700699-001



PN 50001130 / 10700702-001

TECHNICAL SPECIFICATIONS

Description	Part number	Size / Specification	Qty	Serial number	Remarks
4-way lifting sling	50001110	2.8 t	1	NL 0154369	
Lifting sling	50001130	1.4 t	1	NL 47405034	
Lifting sling	50001130	1.4 t	1	NL 02435248	

MANUAL TONGS

HT-100 spare parts

HT-100 lug jaw assembly, 4"–8.1/2", torque rating 100,000 ft-lbs.



MANUAL TONGS AND SPARE PARTS

Description	Part number	Size / Specification	Qty	Serial number	Remarks
HT-100 lug jaw assembly	200663-1	4 – 8.1/2 · 100,000 ft-lbs	1		HT-100 SET

PetroRigs

AUTOMATED IRON ROUGHNECKS AR-5000

NOV AR-5000

Automated iron roughnecks. Drill pipe module: make-up tubular diameter 3.1/2"–9.3/4", max. torque 100,000 ft-lbs.



Stock photo · AR-5000 iron roughneck


AR-5000 IRON ROUGHNECKS

Description	Part number	Size / Specification	Qty	Serial number	Remarks
AR-5000 automated iron roughneck	30134086-1	DP module 3.1/2 – 9.3/4 · Max. torque 100,000 ft-lbs	1	AR 50009R11	MFG year 4-15-08; date repaired 9-16-15; test date 9-16-15 · Repaired & tested 9-16-15 (OES job no. 150404)
AR-5000 automated iron roughneck	30182221 1	DP module 3.1/2 – 9.3/4 · Max. torque 100,000 ft-lbs	1	AR 50H02P009	MFG year 7.01.2007

PetroRigs

HYDRAULIC UTILITY WINCH

Double drum winch for mousehole, SWL 10 t

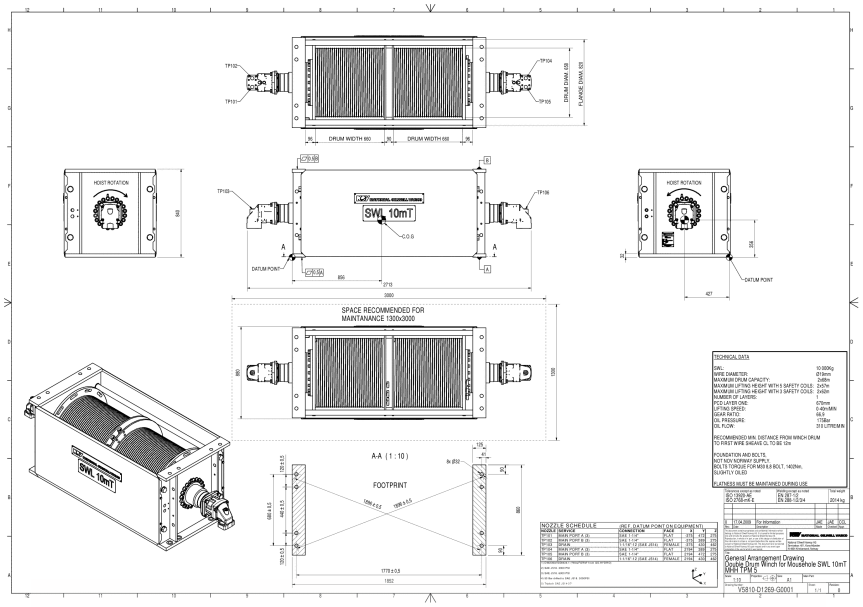

General arrangement drawing V5810-D1269-G0001

TECHNICAL SPECIFICATIONS

Item	NOV double drum hydraulic winch for mousehole (MHH TPM 5)
Type code	10T-2X62M-19-2XPWD3300-i66.9
Machine no. (serial)	V5810-2210
Project / year	V5810 / 2010
Class ID	3008
Safe working load	10,000 kg
Wire diameter	Ø19 mm
Max. drum capacity	2 × 68 m
Max. lifting height	2 × 57 m (5 safety coils) / 2 × 62 m (3 safety coils)
Lifting speed	0–40 m/min
Oil pressure / oil flow	175 bar / 310 l/min
Gear ratio	66.9
Weight	2,014 kg / 4,440 lbs
Documents	With databook · GA drawing V5810-D1269-G0001

FISHING TOOLS

Bowen Series 150 overshot components

TECHNICAL SPECIFICATIONS

Description	Part number	Size / Specification	Qty	Serial number	Remarks
9857-038 981 OD AW 663574-2			1		
9857-038 981 OD AW 663574-1			1		
OVERSHOT 9226-010 818 OD AP 330983-1-56 / 9218-055 8 1/8 OD 6159 ID 36LG AP 351540-3-1 / 9216 025 AW ?		8.1/8 OD	1		

PetroRigs

SPARE PARTS

NOV rig equipment spare parts



Stock photo · Drawworks disc brake controller



Stock photo · Grip head 14"–24"



Stock photo · Gripper yoke 20"



Stock photo · HPS-03 1000 torque wrench



Stock photo · HPS-03 1000 torque wrench



Stock photo · HPS-03 1000 knuckle links

NOV SPARE PARTS

Description	Part number	Size / Specification	Qty	Serial number	Remarks
Block, cross-studded 4-1/16" 10K BX-155	20385734	4.1/16 · 10,000 psi	2		NEW · BLOCK, CROSS-STUDDED 4-1/16 10K BX-155 CRA-316 API 6A (end of text hidden in source cell)
API 6A component	1408/1-0		1		Refurbished · ISO 10423 6A 20TH ED P+U DD PSL3 PR1 11/14
Drawworks disc brake controller	2111752		1		Manufacturer: NOV
Lever assembly, shifter shaft (drawworks)	DWKSLEVER		1		NEW · LEVER, 621826-A5, ASSEMBLY, SHIFTER SHAFT, Manufacturer: NOV
Koomey controls	20078979		1		NEW · KOOMEY CONTROLS
Grip head 14"–24" (part of main arm)		14 – 24	1	D1201-A074.1	NEW · PART OF MAIN ARM, PROJECT V5715
Gripper yoke 20"		20	1	3D67802 / V5758-4410	NEW · PROJECT: V5758, YEAR: 2011
HPS-03 1000 top drive – torque wrench 115,000 ft-lbs	D1436-00185 / 95183-008	115,000 ft-lbs	1		NEW · NEW SPARE PART
HPS-03 1000 top drive – knuckle links (set)	D1434-00063 [27184]	650 sTon / set	1 set	NL 27142_LEFT - 27142_RIGHT	SPARE PART - P/N D1434-00063 [27184], WL0119438-0119440 - 27142YC FWH1 43001V



BVM

BVM Corporation

Side door 90° elevators · Collar type elevator · Casing spider · Casing slips

PetroRigs

SIDE DOOR 90° ELEVATORS

BVM SX and SLX

Side door 90° elevators for collar type casing. SX rated 350 / 500 sTon, SLX rated 150 / 250 sTon.



Stock photo · BVM SLX elevators and 36" spider



Stock photo · Side door elevators in stock

TECHNICAL SPECIFICATIONS SX / SLX

Type	Part number	Oracle number	Size [inches]	Load Rating [sTon/Tonne]	Max. Weight [lbs]	[kg]	Serial number	Remarks
SX	30729		16	500 / 454	1,346	611	SX16'' / 500	
SX	29966		16	350 / 318	1,280	581	23621-1	
SX	30729		22	500 / 454			22500 104127	
SX	30729		22	500 / 454			22500 104128	
SX	30729		20	500 / 454	1,346	611	20500 104129	
SX	29966		20	350 / 318	1,280	581	24483	
SLX	33175		30	150 / 136	1,276	579	27263	
SLX	33180		36	150 / 136	2,100	953	27061	
SLX	43180		36	250 / 227	2,200	998	26552	

COLLAR TYPE ELEVATOR

BVM TA

TA ELEVATOR

Type	Part number	Oracle number	Size [inches]	Load Rating [sTon/Tonne]	Max. Weight [lbs]	[kg]	Serial number	Remarks
TA	39342		6	150 / 136				BVM

CASING SPIDER

BVM



Stock photo · 36" 500 ton casing spider

TECHNICAL SPECIFICATIONS

Type	Part number	Oracle number	Size [inches]	Load Rating [sTon/Tonne]	Max. Weight [lbs]	[kg]	Serial number	Remarks
Spider	9F09-500	7K 201009	36	500 / 454			7K 201009	

CASING SLIPS

BVM UC-3 type slips

TECHNICAL SPECIFICATIONS

Make	Type	No. of segments	Size [inches]	Serial number / ID marking	Remarks
BVM	BRT CO	28		STPF 13. 3/8 IN SIZE 7704-A-17	**NEW**
BVM	UC-3	44		98711 27605	**NEW**

BLOHM + VOSS

Blohm + Voss Oil Tools (B+V)

VES-SD hydraulic elevators & bushings · SDS side door elevators · HCS casing spider · Slip lifter · Single joint elevators · VES-CL bushings · PS-1000 power slips · RT adapter rings

PetroRigs



VES-SD 500 DOUBLE DOOR HYDRAULIC ELEVATORS

Hydraulic double door bushing elevators, 500 sh t

VES-SD 500 hydraulic double door elevators with changeable bushings. Bushing sizes per B+V bore code (236 = 9.5/8" casing, 253 = 30" casing).



Stock photo · VES-SD 500 elevators



Stock photo · VES-SD 500 elevators

VES-SD 500 ELEVATORS

Type	Part number	Size [inches]	Load Rating [sh t / Tonne]	Weight	Serial number	Remarks
VES-SD 500	646 600-Y	30 (frame 20 – 30)	500 / 454	3,800 kg		WITH 30'' BUSHING
VES-SD 500		21	500 / 454			WITH 18'' BUSHING
VES-SD 500		NN	500 / 454			BUSHING LESS

VES-SD BUSHINGS

Type	Part number	Size [inches]	Load Rating [sh t / Tonne]	Weight	Serial number	Remarks
VES-SD bushing	675030-236	9.5/8 casing	750 / 680		SN 86910	
VES-SD bushing	675030-236	9.5/8 casing	750 / 680		SN 86910	
VES-SD bushing	675030-236	9.5/8 casing	750 / 680		SN 86911	
VES-SD bushing	675030-236	9.5/8 casing	750 / 680		SN 86911	
VES-SD bushing	645600-253	30 casing	500 / 454		SN 94126	SMALL SIDE
VES-SD bushing	645600-253	30 casing	500 / 454		SN 94126	SMALL SIDE
VES-SD bushing	645600-253	30 casing	500 / 454		SN 94126	BIG SIDE
VES-SD bushing	645600-253	30 casing	500 / 454		SN 94126	BIG SIDE

SDS SIDE DOOR ELEVATORS

Side door, collar type elevators



TECHNICAL SPECIFICATIONS

Type	Part number	Size [inches]	Load Rating [sh t / Tonne]	Weight	Serial number	Remarks
SDS-350/4	643 560	18.5/8 – 21.1/2	350 / 318	1,395 lbs / 633 kg		
SDS-350/5	643 580-Y-BC	24 – 30	350 / 318	2,375 / 1,077		

PetroRigs

HCS HINGED CASING SPIDER

HCS-500, 30"



HCS-500 SPIDER AND REDUCING BUSHING

Type	Part number	Size [inches]	Load Rating [sh t / Tonne]	Weight	Serial number	Remarks
HCS-500 spider	553 460	30	500 / 454	3,350 kg		HCS-500
Reducing bushing	553 464	30 × 20 – 18.5/8		690 kg	SN 85441	

SLIP LIFTER

Slip lifter 350 t, 20"–30"



Stock photo · Slip lifter 558 020

TECHNICAL SPECIFICATIONS

Type	Part number	Size [inches]	Load Rating [sh t / Tonne]	Weight	Serial number	Remarks
Slip lifter	558 020	20 – 30	350 metric t	1,600 kg		weight w/o slips
Slip assembly	558 063	20		516 kg		

SINGLE JOINT ELEVATORS

SJS center latch single joint elevators



TECHNICAL SPECIFICATIONS

Type	Part number	Size [inches]	Load Rating [sh t / Tonne]	Weight	Serial number	Remarks
Single joint elevator	650381 R		5			SHB
SJS-5/5	660 540-Y-BC*	13 – 16	5 / 4.5	123 / 56		SHB
SJS-5/5	660 540-Y-BC*	13 – 16	5 / 4.5	123 / 56		SHB
SJS-5/5	660 540-Y-BC*	13 – 16	5 / 4.5	123 / 56		SHB
SJS-5/4	660 520-Y-BC*	9.5/8 – 12.3/4	5 / 4.5	98 / 44		BC 237
SJS-5/4	660 520-Y-BC*	9.5/8 – 12.3/4	5 / 4.5	98 / 44		BC 237
SJS-5/4	660 520-Y-BC*	9.5/8 – 12.3/4	5 / 4.5	98 / 44		BC 237
SJS-6/6	660 600-Y-BC*	16.3/4 – 20	6 / 5.4	138 / 63		BC 43001V
SJS-6/8	660 640-Y-BC*	22 – 30	6 / 5.4	173 / 78		

VES-CL BUSHINGS

Bushings for VES-CL hydraulic operated elevators

Bore code 109 = 4.1/2" EU / 5" IEU drill pipe; 114 = 6.5/8" IEU drill pipe.



PetroRigs

TECHNICAL SPECIFICATIONS

Type	Part number	Size [inches]	Load Rating [sh t / Tonne]	Weight	Serial number	Remarks
VES-CL bushing	613902	3.1/2				
VES-CL bushing	613902-109	4.1/2 EU / 5 IEU DP 18°			82064	
VES-CL bushing	613902-109	4.1/2 EU / 5 IEU DP 18°			79926	
VES-CL bushing	613902-114	6.5/8 IEU DP 18°			82058	
VES-CL bushing	613902-119				78907	

PS-1000 HYDRAULIC OPERATED POWER SLIPS

Power slips, slip assemblies, insert carriers and guide plates

PS-1000 hydraulic power slip, 2.3/8"–22", 1,000 sh t, for 49.1/2" rotary table.



Stock photo · PS-1000 power slips, SN 78880 / 78881

PS-1000 POWER SLIPS

Type	Part number	Size [inches]	Load Rating [sh t / Tonne]	Weight	Serial number	Remarks
PS-1000	772 000-RT	2.3/8 – 22	1,000 / 907	6,800 kg	SN 78880	weight w/o carrier
PS-1000	772 000-RT	2.3/8 – 22	1,000 / 907	6,800 kg	SN 78881	weight w/o carrier

PS-1000 SLIP ASSEMBLIES

Type	Part number	Size [inches]	Load Rating [sh t / Tonne]	Weight	Serial number	Remarks
Slip assembly	775 120-1	2.3/8 – 14	1,000 / 907		SN 101226	
Slip assembly	775 120-2	14.3/4 – 20	1,000 / 907		SN 88165	

PS-1000 INSERT CARRIERS

Type	Part number	Size [inches]	Load Rating [sh t / Tonne]	Weight	Serial number	Remarks
Insert carrier	775 630-247	18.5/8 – 18			SN 90178	
Slip assy / carrier	775 120-3	22			SN 86712	
Insert carrier	775 630-247	18.5/8 – 18			SN 90 179	
Insert carrier	775 630-249	20			SN 84632	
Insert carrier	775 630-245	16			SN 114252	**NEW**

PS-1000 GUIDE PLATES

Type	Part number	Size [inches]	Load Rating [sh t / Tonne]	Weight	Serial number	Remarks
Guide plate	756 421	6.1/4 / 5.3/4 DC (also 5.7/8 DP)				
Guide plate	756 421	6.1/4 / 5.3/4 DC (also 5.7/8 DP)				
Guide plate	756 422	6.5/8 – 7.5/8 casing; 8 / 7.1/2 DC				
Guide plate	756 423	9.1/2 / 9 – 9.3/4 / 9.1/4 DC (also 9.5/8 casing)				
Guide plate	756 424	6.1/2 – 6.3/4 DC (also 6.5/8 DP)				
Guide plate	756 425	8.5/8 casing; 8.1/4 – 8.1/2 DC				
Guide plate	756 428	13.5/8 – 14 casing				
Guide plate	775 456	18				
Guide plate	775 457	20				
Guide plate	775 458	22				
Guide plate	775 459	16				
Guide plate	775 459	16				
Guide plate	775 459	16				
Guide plate	756 472	13.3/8				
Guide plate	756 476	4.1/2 – 5				
Guide plate	756 476	4.1/2 – 5				

PetroRigs

MASTER BUSHINGS & RT-ADAPTERS

Rotary table adapter rings





Stock photo · Split adapter ring 553 290, SN 79635

RT-ADAPTERS

Type	Part number	Size [inches]	Load Rating [sh t / Tonne]	Weight	Serial number	Remarks
Split adapter	553 290	60.1/2 × 49.1/2	1,000 / 907		SN 79635	FOR NATIONAL ROTARY TABLE
Adapter	55372	24			SN 79635	FOR NATIONAL ROTARY TABLE

PetroRigs

OTHER BRANDS

Instrumentation · Motors · Pipe handling · Fishing tools

ScanSense · Thames Side · Tech Cal · General Electric · Brook Crompton · Union Supplies / Emerson · Maritime Hydraulics / MHWirth · Aker MH

PetroRigs

LOAD CELLS AND INSTRUMENTATION

TECHNICAL SPECIFICATIONS

Make	Description	Part number	Size / Specification	Qty	Serial number	Remarks
ScanSense	Load cell pin	702-90100	Range 6200 kN	1		Refurbished · LS-2010-SP N-3173 VEAR, Range: 6200 Kn Output: 4- · Calibration report
Tech Cal	Pressure chart recorder, model 2B530	2B530	Pen 1: 3,000 psi / Pen 2: 10,000 psi	1	01964	**NEW** · PEN1: 3.000 PSI, PEN 2: 10.000 PSI
Thames Side	VC3500 double shear beam load cell	VC3500-50T-NOV		6	1411136 (15) / 1411142 (15)	

ELECTRIC MOTORS AND BLOWERS

TECHNICAL SPECIFICATIONS

Make	Description	Part number	Size / Specification	Qty	Serial number	Remarks
Union Supplies Ltd. (Emerson motor)	Blower for GE-752 DC motors	5GDY68B3	10 HP, 440 V, 3 ph, 60 Hz	1		**NEW** · MFG P/N 5GDY68B3 BLOWER GE BLOWER ASSEMBLY, LOW PROFILE, EMERSON 10 HP, 440V, 3PH, 60HZ. CONSTRUCTED IN CARBON. MODEL 752 DC, MANUFACTURER: UNION SUPPLIES LTD.
General Electric	Blower fan motor for A-1700 mud pump	5KE254CC105 AP	254T frame · 15 HP	1		**NEW** · 15 HP, 254 T FRAME, 3525 RPM, 33,7/16,8 AMPS, 230/460 VOLT, 3 PHASE, 60 HZ.
Brook Crompton	AC electric motor for VSM 300 shaker	132E000316T	3.0 kW, 460 V, 50–60 Hz	1		**NEW** · TYPE: W-EF132MS-H, KW 3,0, 50 - 60 Hz, V 460
Brook Crompton	AC electric motor for VSM 300 shaker	132E000316T	3.0 kW, 460 V, 50–60 Hz	1		**NEW** · TYPE: W-EF132MS-H, KW 3,0, 50 - 60 Hz, V 460

PetroRigs

PIPE HANDLING AND MISCELLANEOUS



Stock photo · DDM 650 pipe handler



Stock photo · Fram alloy blue chain

PIPE HANDLING AND CHAIN

Make	Description	Part number	Size / Specification	Qty	Serial number	Remarks
Aker MH AS	Fram alloy blue chain			59 m		**NEW** · MATERIAL: BA0073786, 59 METER
Maritime Hydraulics / MHWirth (now HMH)	DDM 650 pipe handler	DDM 650-HY-BJ011		1	1701068	Refurbished · ACCT CODE: 7350000

CASING SLIPS (CMS-XL TYPE)

Make	Type	No. of segments	Size [inches]	Serial number / ID marking	Remarks
HX	CMS-XL	13		13. 3/8 0151 7K 12 2010.11	

FISHING TOOLS

Make	Description	Part number	Size / Specification	Qty	Serial number	Remarks
	65303-016 AW 663423-1 88 OD			1		
	5330/005 AP675326-2-1			1		
	921/080 8 1/4'' EXT SUB			1		

PetroRigs